



TOKISTAR LIGHTING INSTRUCTION MANUAL

C2-96-24V

24 VOLT/96 WATT TRANSFORMER

General

This transformer is to be installed in accordance with Article 450 of the National Electrical Code. The transformer must be installed in a well ventilated area free from explosive gases and vapors. Proper operation requires the free flow of air. Only a qualified electrician should install this hardwired transformer.

Precautions Before Installing

Check the label and ensure the transformer has the proper input voltage, output voltage and wattage for the job. Check the wire markings to ensure they match the wiring diagram on this instruction sheet.

Mounting

Select a suitable location capable of supporting the weight of the transformer. Use the two keyholes provided on the mounting flange. The transformer must be mounted vertically with the wiring compartment pointing down.

Input Connections/Grounding

Remove the wiring compartment knockouts and install strain reliefs. With power turned off, route the input wires through a strain relief and connect one wire to black and one wire to white. For all wire connections use only UL Listed wire nuts and connectors of suitable size and type.


The transformer case **MUST** be grounded in accordance with the N.E.C. Connect the transformer green wire to ground.

Output Connections

With all unused leads insulated, turn power to the unit on. Check the secondary voltage to be sure it is right for the load. Turn power to the transformer off. Remove the wiring compartment knockouts and install strain reliefs for the lead wires from the lighting fixtures. Each set of lighting fixture leads should be routed through the strain relief and connected to the set of red and blue wires.

Transformer Data

INPUT VOLTAGE	120VAC / 60 Hz
OUTPUT VOLTAGE	24 VAC
CAPACITY (WATTS)	96 VA
INSTALLED BREAKER (s)	1 @ 5 Amps
WEIGHT	3 Pounds

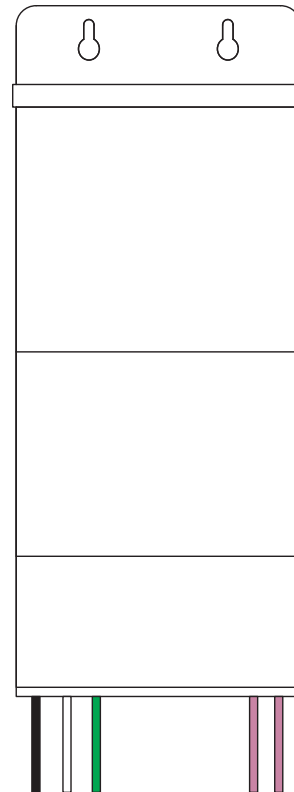

INPUT WIRES:
Black & White

GROUND WIRE: Green

OUTPUT WIRES:
Purple & Purple

TOKISTAR LIGHTING

1015 E. DISCOVERY LANE ANAHEIM, CA 92801

TEL: 714 772 7005 FAX: 714 772 7014

E-mail: info@tokistar.com Web site: www.tokistar.com

Version 1.0