


# EXC Series- 1.8 watt LEDs

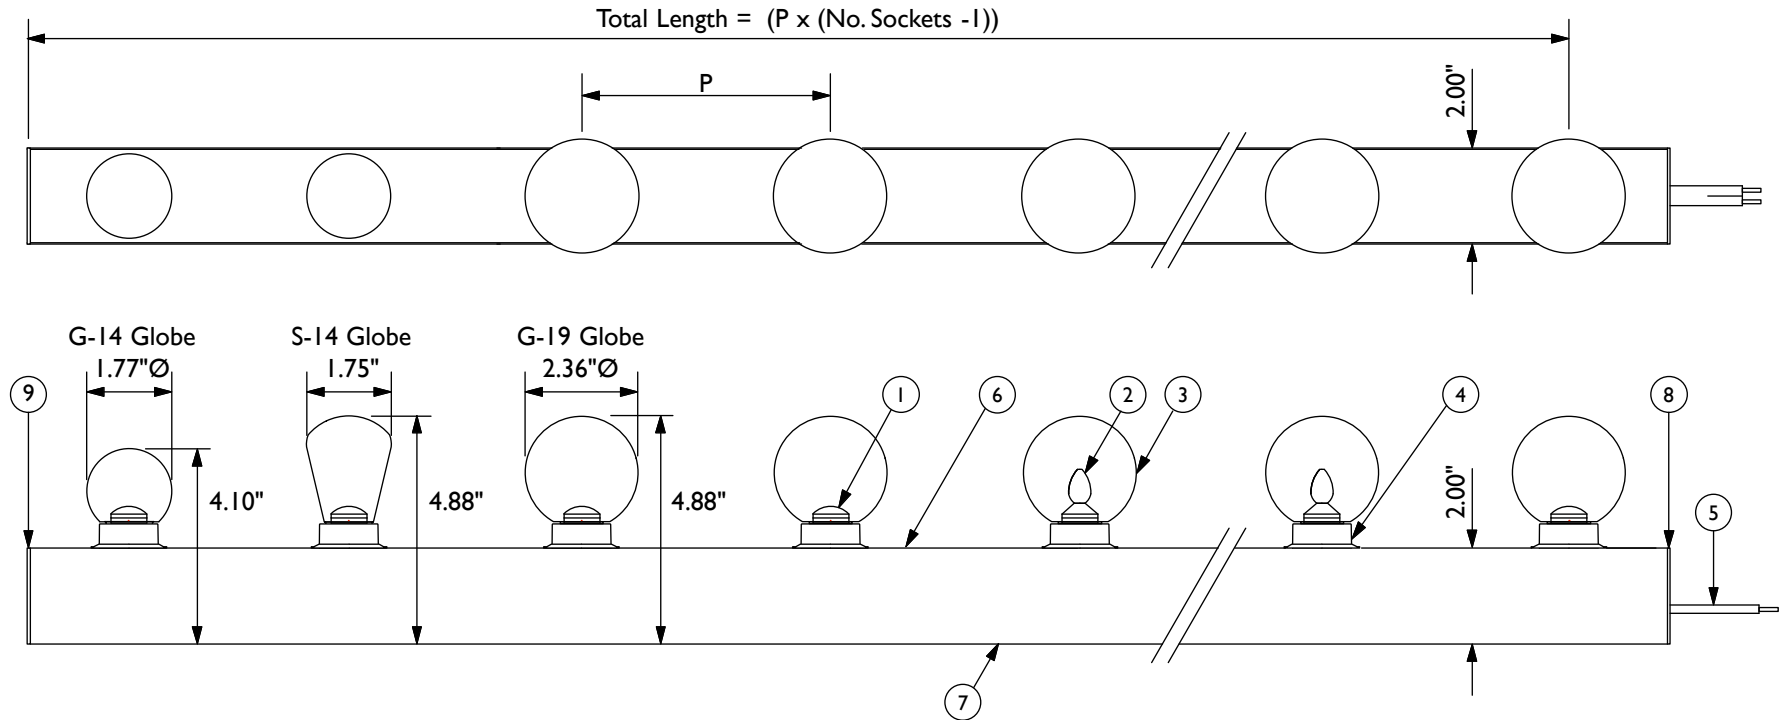

Catalog#	P(Inch)	Extrusion Length	Max. Fixture Length
EXC-6-(LED Code)-(G-14, S-14, G-19)-(C,F)	6" $\pm$ .075	10 FT.	125 FT.
EXC-12-(LED Code)-(G-14, S-14, G-19)-(C,F)	12" $\pm$ .075	10 FT.	200 FT.
EXC-18-(LED Code)-(G-14, S-14, G-19)-(C,F)	18" $\pm$ .075	10 FT.	225 FT.

- C = Clear Globe, F = Frosted Globe
- Standard Extrusion Finish is Satin Aluminum
- Custom Finishes Available upon request

1.8Watt LED 24VAC/75.0mA			
Part#	LED Code	Color	Lumen
EX-VI-LW	VILW	2000K	36Lm
EX-VI	VI	2400K	40Lm
EX-UB-LW	UBLW	2000K	41Lm
EX-UB	UB	2400K	45Lm

Virtual Incandescent LED (EX-VI-LW & EX-VI)  
Not Recommended for use with  
Frosted Globes



## TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE  
ANAHEIM, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com

EXC Series Submittal	No.	Part	Material
Catalog#: EXC-_(LED Code)-(G-14, S-14, G-19)-(C,F)	1	EX-UB-LW & EX-UB	Solid-State Ultra-Bright LED
Date: November 1, 2016	2	EX-VI-LW & EX-VI	Solid-State Virtual Incandescent LED
Drawn By: R. Cordova	3	Globe	Polycarbonate
Scale: 1:4	4	Socket	PBT
Weight: 410g/per Ft. @ 6" O.C.	5	#12 AWG Wire	PVC with Plated Copper Conductor X 2
	6	Extrusion Cover	Aluminum
	7	Extrusion Base	Aluminum
	8	End Cap (Live End)	Aluminum
	9	End Cap (Dead End)	Aluminum