


# FL SERIES-0.4 WATT TOKILED5®

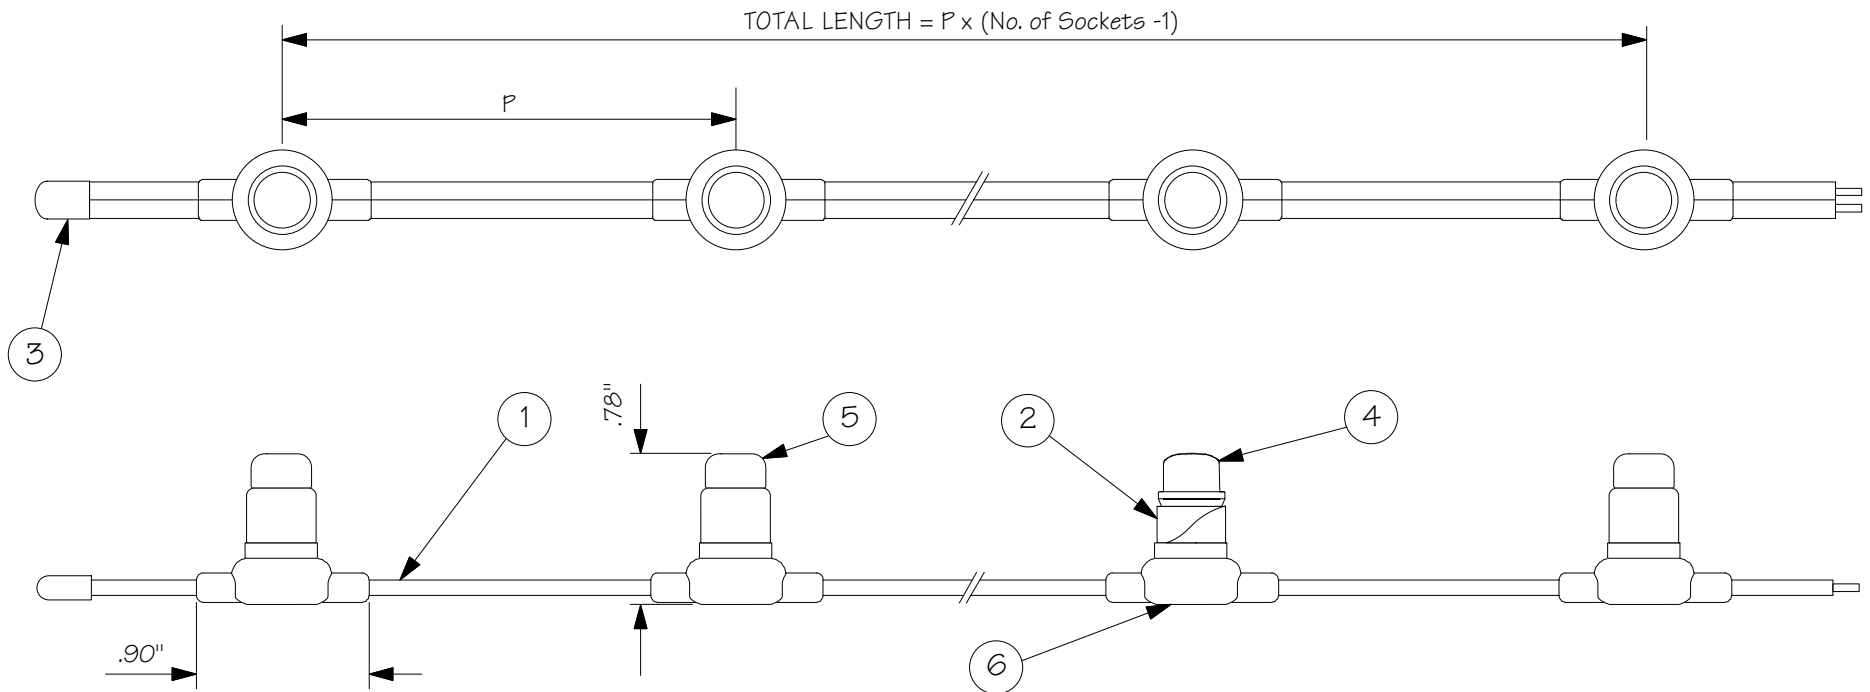

CATALOG#	P (INCH)	MAX. LENGTH
FLBK-60-(LED CODE)-(WP-L02C)	2.4 ± .20	20 FT.
FLBK-110-(LED CODE)-(WP-L02C)	4.25 ± .20	36 FT.
FL(BK,WG)-160-(LED CODE)-(WP-L02C)	6.25 ± .20	50 FT.
FLBK,WG-210-(LED CODE)-(WP-L02C)	8.25 ± .20	56 FT.
FL(BK,WG)-310-(LED CODE)-(WP-L02C)	12.25 ± .20	70 FT.
FLBK-410-(LED CODE)-(WP-L02C)	16.25 ± .20	82 FT.

0.4 WATT TOKILED5 8VDC/50.0mA®			
PART#	LED CODE	COLOR	LUMEN
TLED-LW-UB	LW-UB	2000K WHITE	10.0 Lm
TLED-WW-UB	WW-UB	2400K WHITE	11.0 Lm
TLED-IW-UB	IW-UB	3000K WHITE	12.0 Lm
TLED-WH-UB	WH-UB	6500K WHITE	14.0 Lm

CABLE COLOR CODE: BK=BLACK, WG=WARM GREY  
 WARM GREY AVAILABLE IN 6.25", 8.25" AND 12.25" ONLY  
 WP=OPTIONAL SILICONE CAP FOR OUTDOOR USE



## TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE  
 ANAHEIM, CA 92801  
 TEL: 714 772 7005 FAX: 714 772 7014  
 email: info@tokistar.com Website: tokistar.com

### FL SERIES SUBMITTAL

CATALOG#: FL(BK,WG)-\_(LED CODE)-(WP-L02C)

DATE: JANUARY 1, 2015

DRAWN BY: R. CORDOVA

SCALE: 1:1

WEIGHT: 15g/ft.

NO.

PART

MATERIAL

1

WIRE

PVC INSULATION WITH #18 AWG X2

2

LAMP SOCKET

POLYCARBONATE WITH PLATED COPPER CONTACTS

3

END CAP

PVC

4

LED

SOLID STATE LED

5

SILICONE CAP

SILICONE (CLEAR)

6

INSULATION

HOT MELT