



| Catalog# | LED Spacing | Lens | Length | Power | Weight |
|---------------------------------|-------------|------|---------------|----------|-----------------|
| GRX-(2700, 3000, 4000)-15D-300 | 3" (75 mm) | 15° | 12" (300 mm) | 12 Watts | 0.9 lb. / 400g |
| GRX-(2700, 3000, 4000)-15D-600 | 3" (75 mm) | 15° | 24" (600 mm) | 24 Watts | 1.7 lb. / 750g |
| GRX-(2700, 3000, 4000)-15D-1200 | 3" (75 mm) | 15° | 48" (1200 mm) | 48 Watts | 3.1 lb. / 1400g |

| GRX Series Specifications | |
|---------------------------|----------------|
| Voltage: 24VDC | |
| Current: 125mA Per LED | |
| Power: 3W Per LED | |
| IP Rating: 66 | |
| CRI Value: 85 | |
| Color | Output |
| 2700K | 150 Lm Per LED |
| 3000K | 160 Lm Per LED |
| 4000K | 180 Lm Per LED |

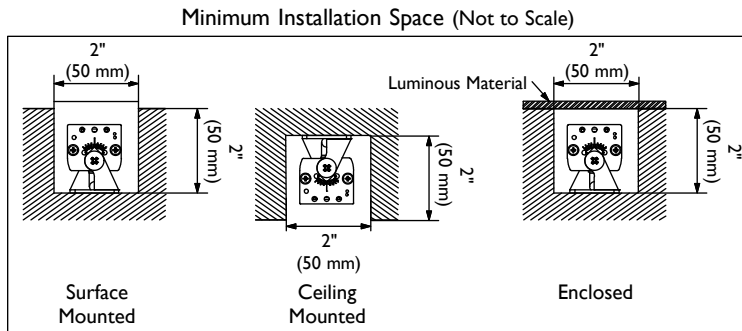

TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE
 ANAHEIM, CA 92801
 TEL: 714 772 7005 FAX: 714 772 7014
 email: info@tokistar.com Website: tokistar.com

| Gradient GRX Series Submittal | No. | Part | Material |
|--|-----|------------------|---|
| Catalog#: GRX-(2700K, 3000K, 4000K)-15D-XXXX | 1 | Extrusion | Anodized Aluminum |
| Date: November 1, 2017 | 2 | Cover | Anodized Aluminum |
| Drawn By: R. Cordova | 3 | Mounting Bracket | SUS |
| Scale: 1:4 | 4 | LED Lens | PC |
| | 5 | Power Cable | PVC Insulation (#18 AWG x 2 / # 22 AWG x 2) |
| | 6 | Power Cable | PVC Insulation (#18 AWG x 2) |
| | 7 | Connectors | Nylon (waterproof) with IP67 rating |