


This proprietary Dimmer provides full-range dimming of Tokistar LEDs. The system components connect with CAT5 cable. Up to 25 dimmer packs may be connected in series if the total length of all CAT5 cable does not exceed 165 feet from the wall dimmer to the last dimmer pack. CAT5 cables are included with units.

The remote wall dimmer has a rotary dial and on/off switch. Power to the wall dimmer is provided from the LED Driver powering the first Dimmer Pack.

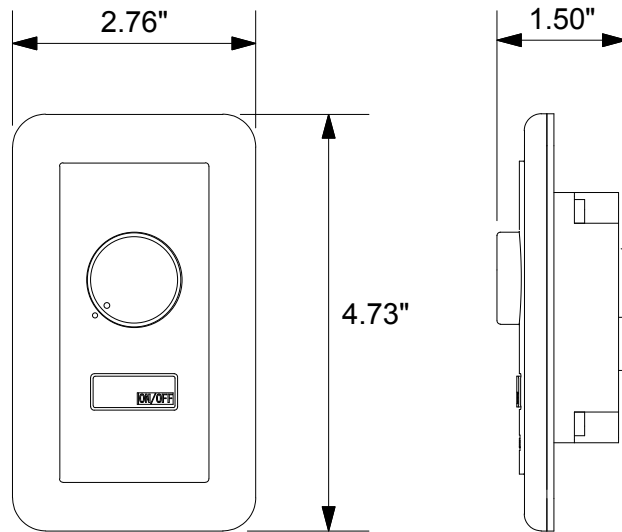

Specifications

1. Input: 6-24VDC
2. Dimensions: 1.50" D x 2.76" W x 4.73" H
3. Weight: 110g / 0.25 lbs
4. Operating Temperature: 0-40°C
5. Standards: ETL LISTED to UL 2108 when used with Tokistar lighting products



TOKISTAR LIGHTING INC.

1015 EAST DISCOVERY LANE
ANAHEIM, CA 92801
TEL: 714 772 7005 FAX: 714 772 7014
email: info@tokistar.com Website: tokistar.com

LC-DMR: Wall Dimmer
Input: 6-24VDC