
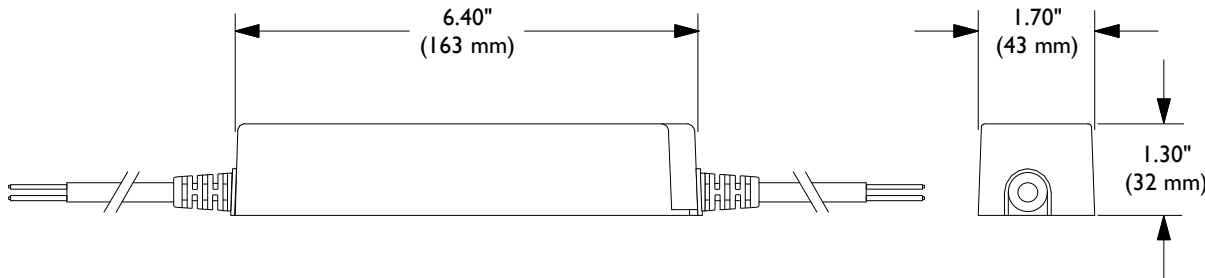


AC Input
Brown Wire: AC Line
Blue Wire: AC Neutral

DC Output
Black Wire: -V
Red Wire: +V

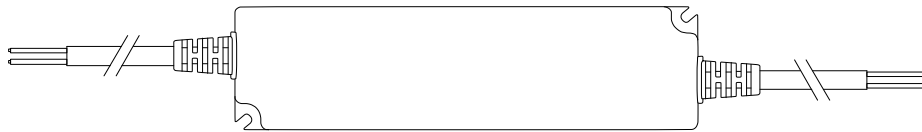

Specifications

1. Input Range: 100~240VAC
100~277VAC (North America Only)
2. Frequency Range: 50/60 Hz
3. Output: 24VDC (+/- 3%)
4. Max. Output Current: 1.67A
5. Max. Output Power: 40W
6. Protection: Overload, Over Voltage, Short Circuit, Over Temperature
7. Working Temperature: -30°C~+50°C
8. Dimensions: 1.70" x 6.40" x 1.30"
9. Enclosure Rating: Suitable for use in Dry, Damp and Wet Locations / IP67 Rated
10. Mounting: Flange Mount
11. Standards: ETL Listed to UL 2108 when used with Tokistar Lighting Products
UL8750, CSA C22.2 No. 250.0-08, ENEC EN61347-1, EN61347-2-13 independent, EN62384, IP67, J61347-1, J61347-2-13 approved; design refer to UL60950-1, TUV EN60950-1
12. Weight: .97 lbs / 440g



TOKISTAR LIGHTING INC.

1015 EAST DISCOVERY LANE
ANAHEIM, CA 92801
TEL: 714 772 7005 FAX: 714 772 7014
email: info@tokistar.com Website: tokistar.com

LDR24-40: 40VA LED Driver
Input: 100~240VAC / Output: 24VDC