

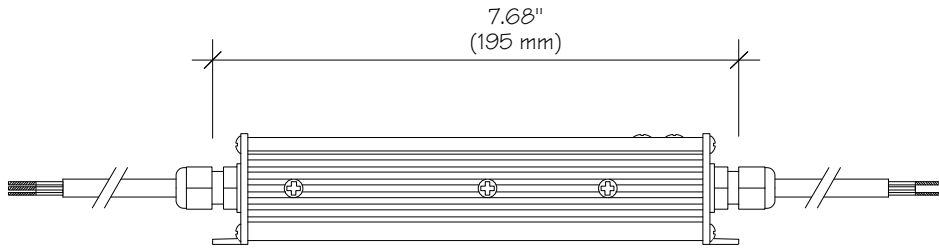


AC INPUT
BROWN WIRE: AC LINE
BLUE WIRE: AC NEUTRAL
YELLOW/GREEN WIRE: GROUND

DC OUTPUT
BLACK WIRE: -V
RED WIRE: +V

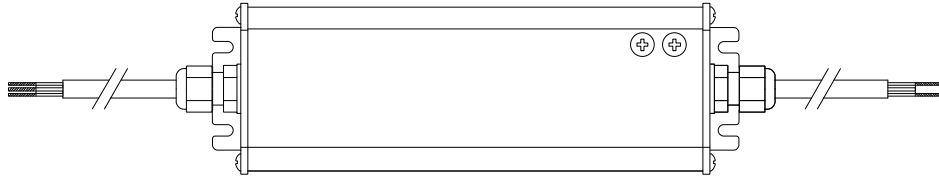

SPECIFICATIONS

1. INPUT RANGE: 100~277VAC
2. FREQUENCY RANGE: 50/60 Hz
3. OUTPUT: 24VDC (+/- 3%)
4. MAX. OUTPUT CURRENT: 4.0A
5. MAX. OUTPUT POWER: 96W
6. PROTECTION: OVERLOAD, OVER VOLTAGE, SHORT CIRCUIT, OVER TEMPERATURE
7. WORKING TEMPERATURE: -30°C~+50°C
8. DIMENSIONS: 2.46" x 7.68" x 1.60"
9. ENCLOSURE RATING: SUITABLE FOR USE IN DRY, DAMP AND WET LOCATIONS / IP66 RATED
10. MOUNTING: FLANGE MOUNT
11. STANDARDS: ETL LISTED TO UL 2108 WHEN USED WITH TOKISTAR LIGHTING PRODUCTS
UL8750, CSA C22.2 No. 250.0-08, TUV EN61347-1, EN61347-2-13, IP66, J61347-1, J61347-2-13 APPROVED
12. WEIGHT: 1.32 lbs / 600g



TOKISTAR LIGHTING INC.

1015 EAST DISCOVERY LANE
ANAHEIM, CA 92801
TEL: 714 772 7005 FAX: 714 772 7014
email: info@tokistar.com Website: tokistar.com

LDR24-4A: 96VA LED DRIVER
INPUT: 100~277VAC / OUTPUT: 24VDC