


Fixture / Socket Detail

Top View

Fixture can rotate 360°



Lens Options
16°, 24°, 30°

LED Color Options

Color: 2700K
Power: 1.2 watt / LED
Voltage: 5 VDC
Output:
16° Lens / 97 Lm
24° Lens / 97 Lm
30° Lens / 80 Lm



Color: 3000K
Power: 1.2 watt/LED
Voltage: 5 VDC
Output:
16° Lens / 97 Lm
24° Lens / 97 Lm
30° Lens / 80 Lm

Color: 4000K & 5000K
Power: 1.2 watt/LED
Voltage: 5 VDC
Output:
16° Lens / 105 Lm
24° Lens / 105 Lm
30° Lens / 85 Lm

Finish Options

Silver (S)
Black (B)

Standard lengths
30 mm, 150 mm, 250 mm
Custom lengths available
on request.

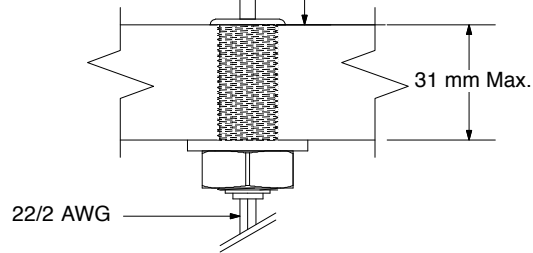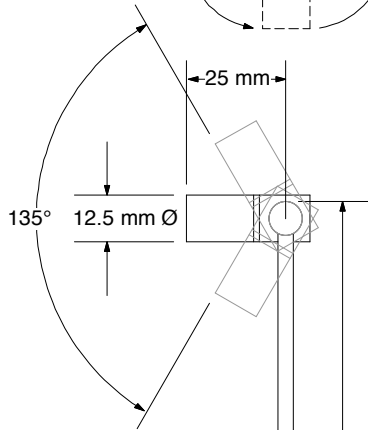


How To Specify

Catalog# MSP-XXXX - XXD - X - XXX

LED Color	Lens Optics	Finish	Stem Length (In mm)
2700	16	S - Silver	
3000	24	B - Black	
4000	30		
5000			



Power Supply & Distribution Box

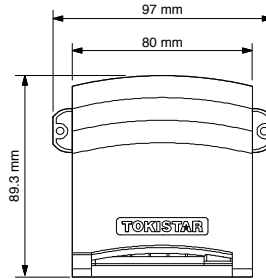

Power Distribution Box

Catalog#: LPS-350-6CH
Input: 5VDC
Output: 350mA x 6 channel
Output Rating: Max. 10.5 Watt


Catalog#: LPSDM-350-6CH
Features Optional 0/1-10VDC Dimming
or Self-Dimming Dial

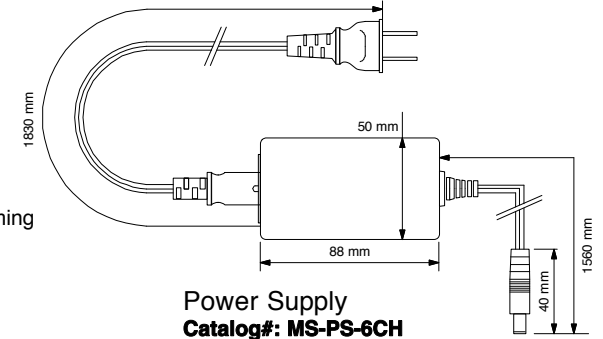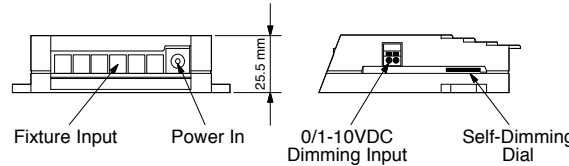

Power Supply

Catalog#: MS-PS-6CH
Input: 100-240VAC 47/63Hz
Output: 5VDC
Output Rating: 4A 20W Max

Wiring Detail

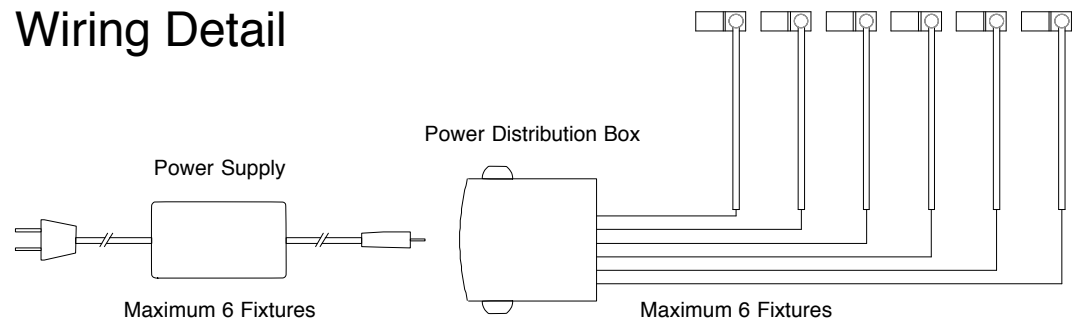

TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE
ANAHEIM, CA 92801
TEL: 714 772 7005 FAX: 714 772 7014
email: info@tokistar.com Website: tokistar.com

DESCRIPTION: Micro Spotlight Detail

DATE: May 1, 2016

SCALE: NTS

DRAWING #: 050116-RCA

DRAWN BY: R. CORDOVA