


# TokiLux KT / Kelvin Tuning Series

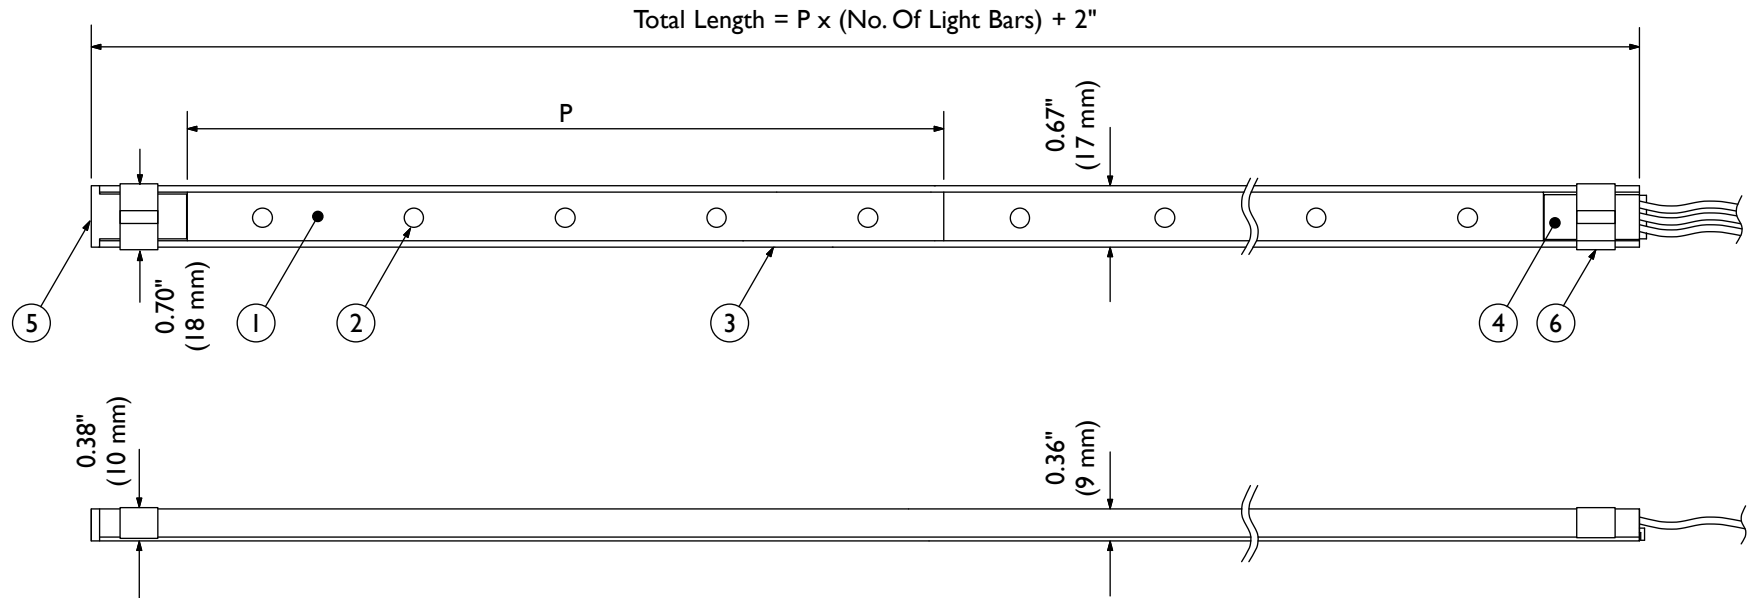

Catalog #	P (Light Bar)	Max. Length
TLX-KT-XX	8 In. (200 mm)	96.5 In. / 2.45 M (12 Light Bars)

XX = No. Of Light Bars

TokiLux KT Specifications			
Input Voltage: 24 VDC			
Current: 167mA Per Light Bar			
Power: 4.0 W Per Light Bar			
Led Code	Color	Output	
KT	2400K-4500K	27.5 Lm-55 Lm Per Watt	165 Lm-330 Lm Per Ft.



## TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE  
ANAHEIM, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com

TokiLux KT Submittal	No.	Part	Material
Catalog#: TLX-KT-XX	1	Light Bar	Rigid Polycarbonate
Date: July 1, 2020	2	LED	Solid-State LED
Drawn By: R. Cordova	3	Rail	Rigid Polycarbonate
Scale: 1:2	4	Feed End	Rigid Polycarbonate
Weight: 55g/0.13 lb per ft.	5	End Cap	Rigid Polycarbonate
	6	Retainer Clip	Stainless Steel