


TokiLux RGB Series

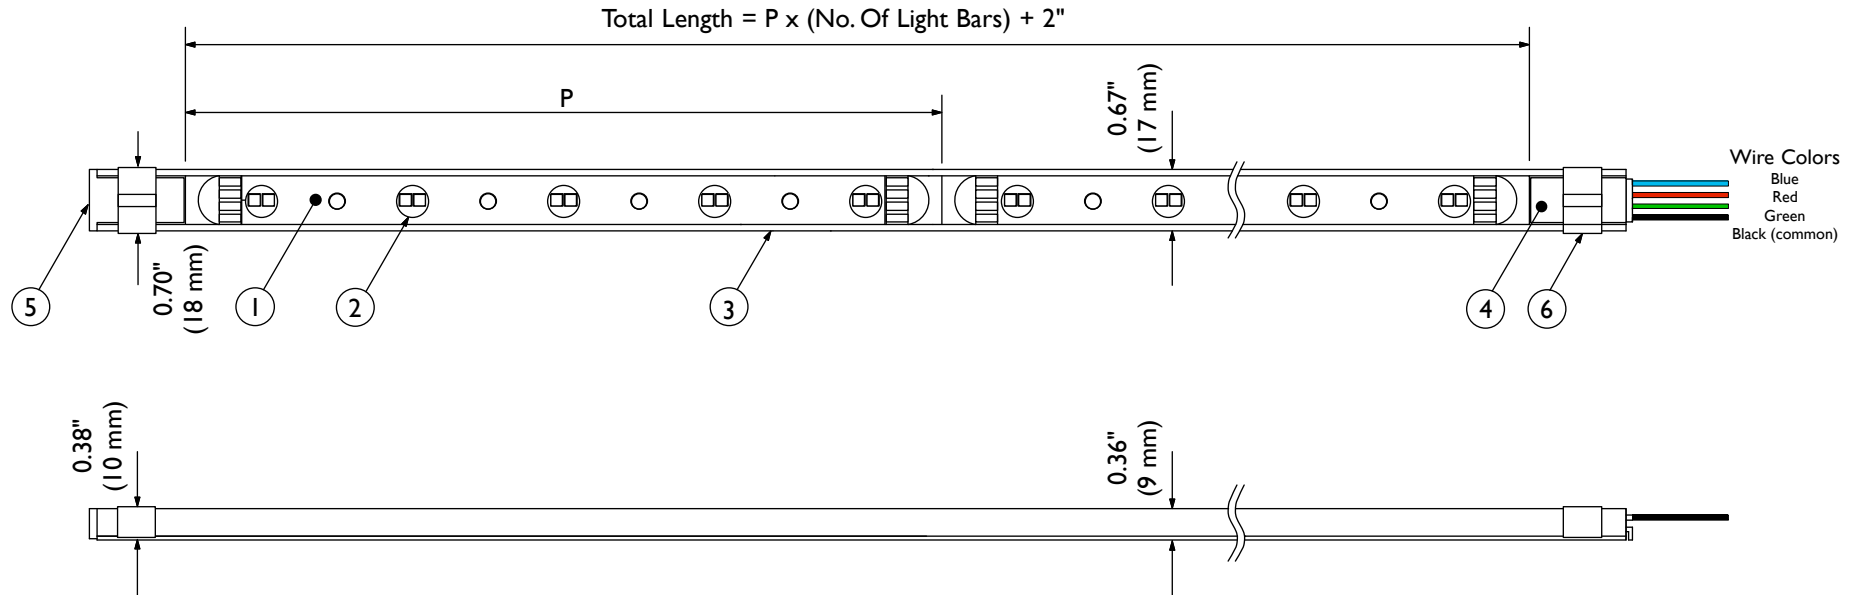

Catalog #	P (Color Bar)	Max. Length
TLX-RGB-XX	8 In. (200 mm)	96.5" / 2.45 M (12 Color Bars)

XX = Number Of Color Bars

TokiLux RGB Specifications			
Voltage: 24VDC			
Current: 100mA Per Color Bar			
Power: 2.4W Per Color Bar			
LED Code	Color	Output	
RGB	RGB Combination	24.16 Lm Per Ft.	87.0 Lm Per Ft.



TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE
 ANAHEIM, CA 92801
 TEL: 714 772 7005 FAX: 714 772 7014
 email: info@tokistar.com Website: tokistar.com

TokiLux RGB Submittal	No.	Part	Material
Catalog#: TLX-RGB-XX	1	Color Bar	Rigid Polycarbonate
Date: July 1, 2020	2	LED	Solid-State LED
Drawn By: R. Cordova	3	Rail	Rigid Polycarbonate
Scale: 1:2	4	Feed End	Rigid Polycarbonate
Weight: 55g/0.13 lb per ft.	5	End Cap	Rigid Polycarbonate
	6	Retainer Clip	Stainless Steel