


# TokiLux Basic Series

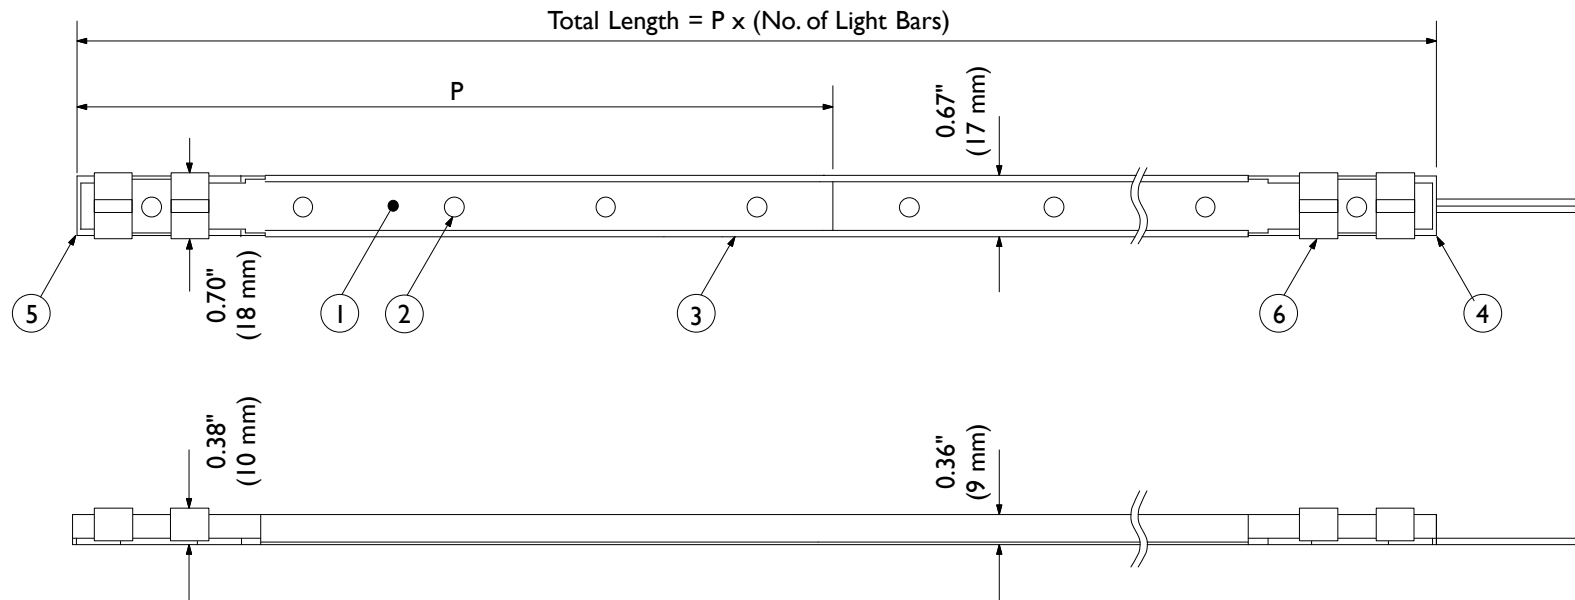

Catalog #	P (Light Bar)	Max. Length
TLX-2000-XX	8 In. (200 mm)	94.625 In. / 2.4 M (12 Light Bars)
TLX-2400-XX	8 In. (200 mm)	94.625 In. / 2.4 M (12 Light Bars)
TLX-2700-XX	8 In. (200 mm)	94.625 In. / 2.4 M (12 Light Bars)
TLX-3000-XX	8 In. (200 mm)	94.625 In. / 2.4 M (12 Light Bars)
TLX-4500-XX	8 In. (200 mm)	94.625 In. / 2.4 M (12 Light Bars)

XX = No. Of Light Bars

TokiLux Specifications			
Input Voltage: 24VDC			
Current: 167mA Per Light Bar			
Power: 4.0 W Per Light Bar			
LED Code	Color	Output	
2000	2000K	50.0 Lm Per Watt	300 Lm Per Ft.
2400	2400K	62.5 Lm Per Watt	375 Lm Per Ft.
2700	2700K	70.0 Lm Per Watt	420 Lm Per Ft.
3000	3000K	72.5 Lm Per Watt	435 Lm Per Ft.
4500	4500K	82.5 Lm Per Watt	495 Lm Per Ft.



## TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE  
ANAHEIM, CA 92801  
TEL: 714 772 7005 FAX: 714 772 7014  
email: info@tokistar.com Website: tokistar.com

TokiLux Basic Submittal	No.	Part	Material
Catalog#: TLX-(LED Code)-XX	1	Light Bar	Rigid Polycarbonate
Date: July 1, 2020	2	LED	Solid-State LED
Drawn By: R. Cordova	3	Rail	Rigid Polycarbonate
Scale: 1:2	4	Feed End	Rigid Polycarbonate
Weight: 55g/0.13 lb per ft.	5	End Cap	Rigid Polycarbonate
	6	Retainer Clip	Stainless Steel