


TXRA SERIES-0.20 WATT TOKILEDDS®



CATALOG#	P (INCH)	EXTRUSION LENGTH	MAX. FIXTURE LENGTH
TXRA-2-(LED CODE)	2 ± .08"	96.5"	30'
TXRA-3-(LED CODE)	3 ± .08"	96.5"	36'
TXRA-4-(LED CODE)	4 ± .08"	96.5"	40'
TXRA-6-(LED CODE)	6 ± .08"	96.5"	50'
TXRA-12-(LED CODE)	12 ± .08"	96.5"	80'

0.2 WATT TOKILEDDS® 8VDC/25.0mA			
PART#	LED CODE	COLOR	LUMEN
TLED-LW-HB	LW-HB	2000K WHITE	6.0Lm
TLED-WW-HB	WW-HB	2400K WHITE	5.4Lm
TLED-IW-HB	IW-HB	3000K WHITE	6.7Lm
TLED-WH-HB	WH-HB	6500K WHITE	8.4Lm

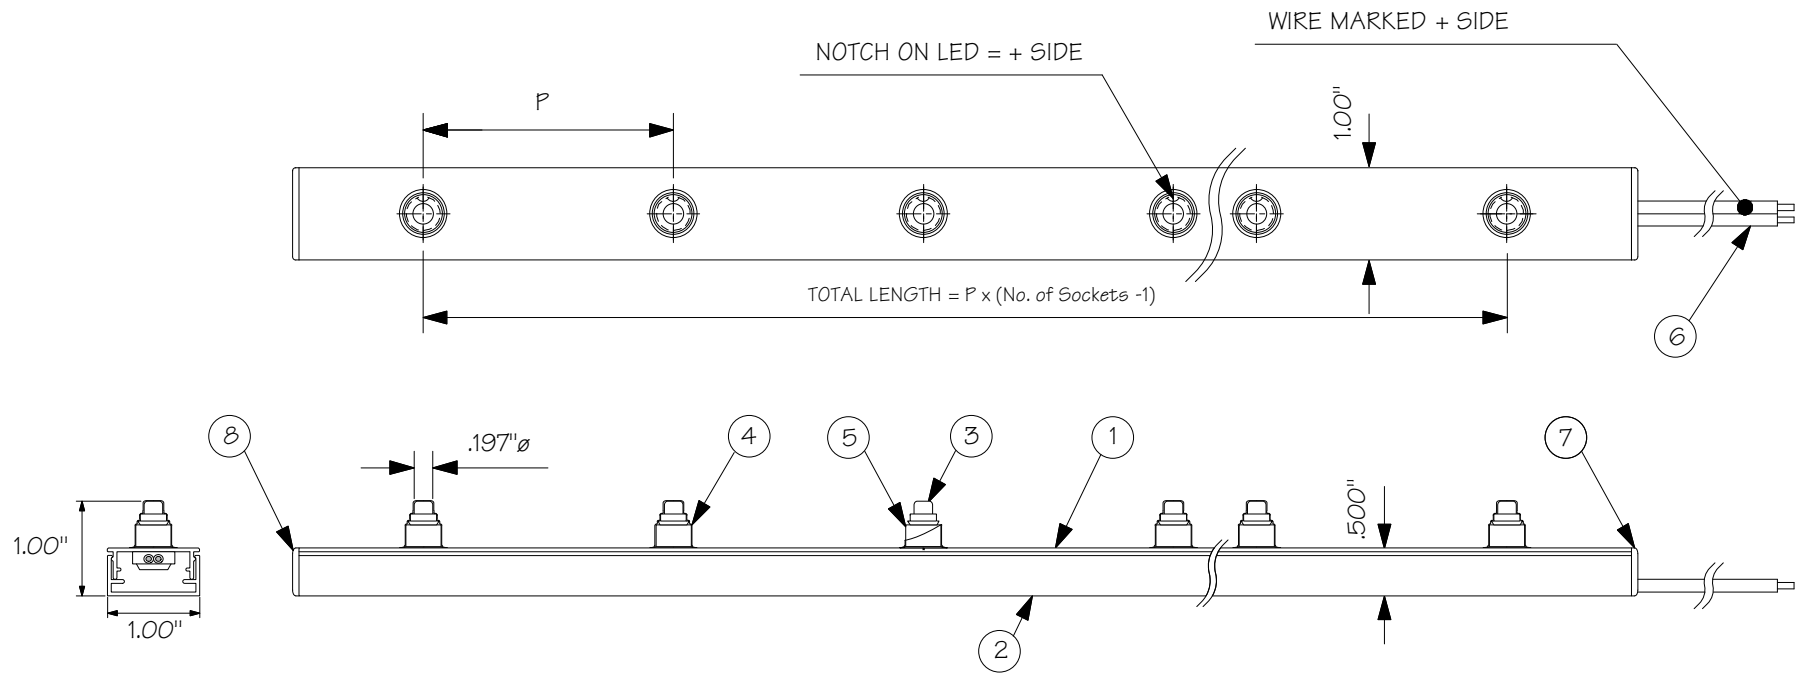

TOKISTAR LIGHTING INC.
 1015 E. DISCOVERY LANE
 ANAHEIM, CA 92801
 TEL: 714 772 7005 FAX: 714 772 7014
 email: info@tokistar.com Website: tokistar.com

TXRA SERIES SUBMITTAL	NO.	PART	MATERIAL
CATALOG#: TXRA-_(LED CODE)	1	EXTRUSION COVER	ANODIZED ALUMINUM
DATE: MAY 1, 2018	2	EXTRUSION BASE	ANODIZED ALUMINUM
DRAWN BY: R. CORDOVA	3	LED	SOLID STATE LED
SCALE: 1:2	4	CAP	SILICONE (CLEAR)
WEIGHT: 80g/FT. @ 2" O.C.	5	LAMP SOCKET	POLYCARBONATE WITH PLATED COPPER CONTACTS
	6	LEAD WIRE	PVC INSULATION WITH PLATED #18 AWG X 2
	7	END CAP (FEED END)	PVC
	8	END CAP (DEAD END)	PVC