


# TOKILUM Series



CATALOG #	P (INCH)	KELVIN	MAX LENGTH
LUM-50-IW	2 ± .08	3000K	20 FT.
LUM-50-WH	2 ± .08	6500K	20 FT.
LUM-50-BL	2 ± .08	BLUE	20 FT.
LUM-100-IW	4 + .16	3000K	40 FT.
LUM-100-WH	4 + .16	6500K	40 FT.
LUM-100-BL	4 + .16	BLUE	40 FT.

TOKILUM LED SPECIFICATIONS		
VOLTAGE: 6VDC		
CURRENT: 80mA		
POWER: 0.48W		
LED CODE	COLOR	OUTPUT
IW	3000K	16Lm
WH	6500K	9.8Lm
BL	BLUE	4.8Lm

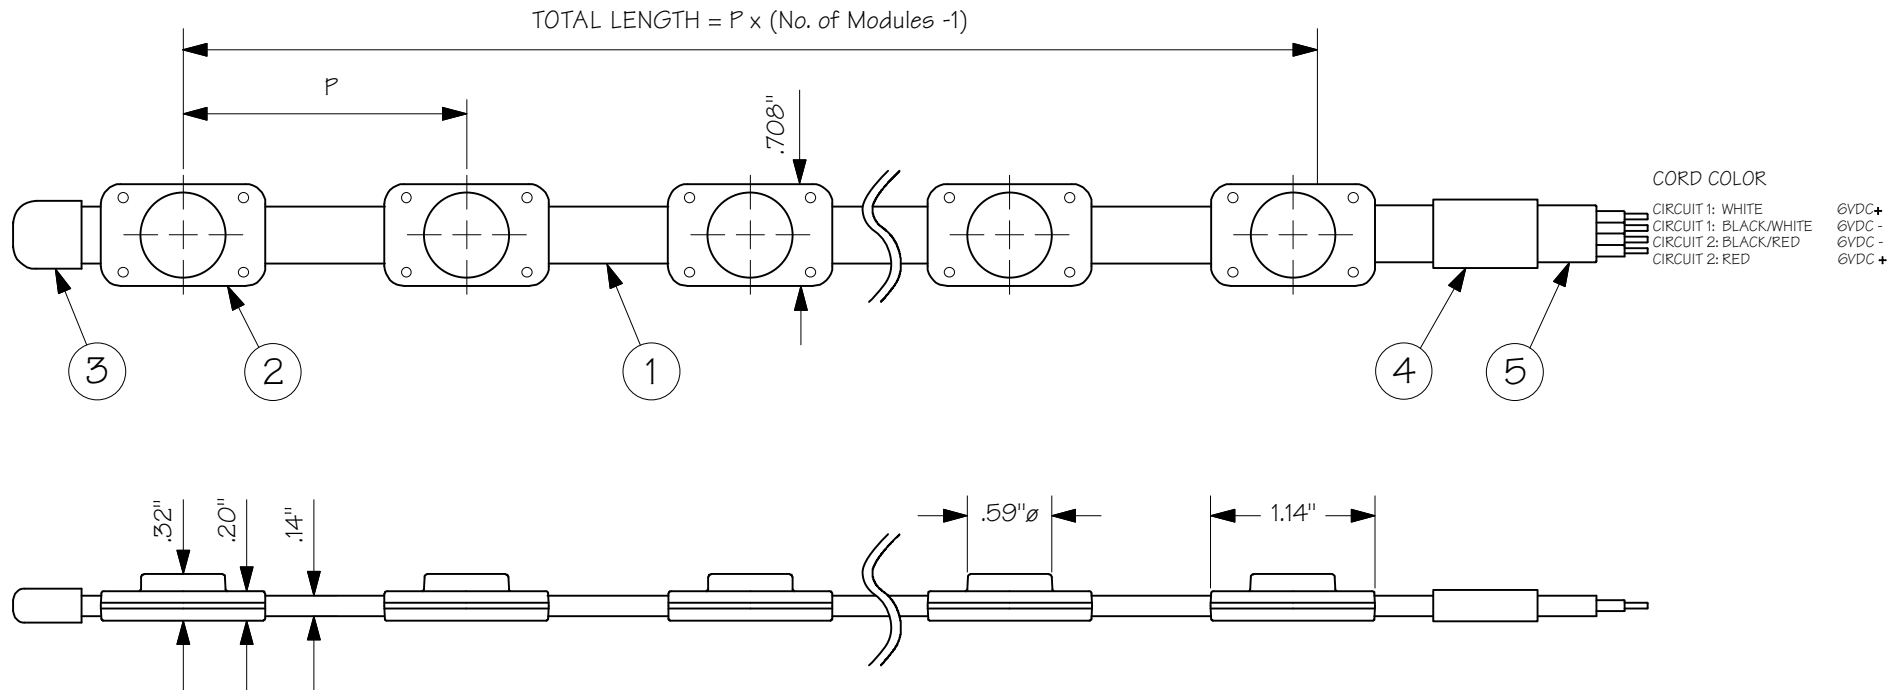

## TOKISTAR LIGHTING INC.

1015 E. DISCOVERY LANE  
 ANAHEIM, CA 92801  
 TEL: 714 772 7005 FAX: 714 772 7014  
 email: info@tokistar.com Website: tokistar.com

TOKILUM SERIES SUBMITTAL	NO.	PART	MATERIAL
CATALOG#: LUM-(50, 100, BL)-_	1	CABLE	PVC INSULATION WITH PLATED #18 AWG X 4
DATE: SEPTEMBER 7, 2012	2	LED	SOLID STATE LED
DRAWN BY: R. CORDOVA	3	END CAP	PVC
SCALE: 1:1.33	4	SHRINK TUBE	POLYOLEFIN
WEIGHT: 43 g/ft.	5	LEAD WIRE	PVC INSULATION WITH PLATED #18 AWG X 4